


Your Covert Video Surveillance System

# You'll never notice this Spyder®

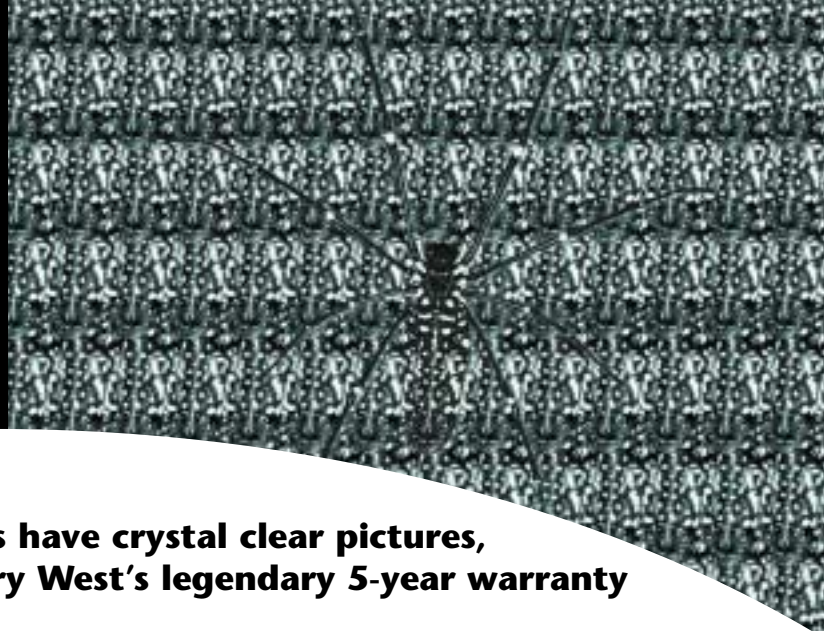

**All Spyder® Covert cameras have crystal clear pictures,  
even in low light and include Sperry West's legendary 5-year warranty**

**Now, finding the right covert camera for your situation is easy!**

Choose from a wide variety of cameras with Sperry West Series A. These include: thermostat, pager cameras, smoked detectors, passive infrared detector, desktop speaker, and fire strobe. When ordering color cameras, add "C" to the model number.



**SW1600 A**



**SW1700 A**



**SW2250 A**

Side view



**SW2600 A**



**SW2800 A**



**SW2900 A**

**SW2200 A**

Straight down view

## **Not your average cameras**

For the thorough job, use Sperry West's custom Series L covert cameras. These include: emergency light, industrial wall clock, desktop clock/radio, hair dryer, "walkman"-style radio cameras, exit sign, loose leaf binder, and pencil sharpener.



**SW0030 L**



**SW1300 L**



**SW1500 L**



**SW1900 L**



**SW2000 L**



**SW2400 L**



**SW2500 L**



**SW2700 L**

*Actual models may vary from photo*



**SPERRY WEST**

For other Sperry West quality video products visit [www.sperrywest.com](http://www.sperrywest.com)

Spyder is a registered trademark of Sperry West Inc.

## All Spyder® covert cameras are:

- Available wireless
- Wired for BNC and power
- Available SNAP connection with Hiflex video and power cable
- Available twisted pair
- Custom models available
- Battery powered models available
- High resolution

## Camera Specifications

### Black and White Cameras

- Horizontal resolution ..... More than 400 lines
- Vertical resolution ..... More than 400 lines
- Minimum illumination ..... 0.2 lux at F1.2
- S/N Ratio ..... More than 46 dB
- Electric shutter ..... 1/60 thru 1/100,000 sec.
- Scanning system ..... 2 to 1 interlace
- Power requirements..... 12 volt DC
- Power consumption ..... 160 mA
- Acceptable operating temp..... -10°C thru 40°C

### Color Cameras

- Horizontal resolution ..... 520 TV lines
- Vertical resolution ..... 520 TV lines
- Minimum illumination ..... 1.5 lux at F1.2
- S/N Ratio ..... More than 48 dB
- Electric shutter ..... 1/60 thru 1/10,000 sec.
- Scanning system..... 2 to 1 interlace
- Power requirements ..... 12 volt D
- Power consumption..... 250 mA
- Acceptable operating temp. .... - 10°C thru 40°C
- White balance/Full auto
- Back light compensation

## Wireless Specifications

### Transmitter

- Output level ..... 94dB microvolts/  
meter at 3 meters
- Operating frequency band ..... 2.4 to 2.4835 GHz ISM band
- Modulation ..... FM (video and audio)
- Video input level ..... 1 V p-p
- Audio input level ..... 1 V p-p
- Video input impedance ..... 75Ω
- Audio input impedance ..... 600Ω
- Power supply ..... 12 Vdc, 500 mA
- Dimensions ..... 6.0 x 4.5 x 1.8 inches
- Weight ..... 11 ounces

### Receiver

- Output level ..... 1 volt p-p (video),  
1 volt p-p (audio)
- Input sensitivity ..... -85 dBm
- Power supply ..... 12 Vdc, 500 mA
- Dimensions ..... 6.0 x 4.5 x 1.8 inches
- Weight ..... 11 ounces
- Antenna ..... 10 dBi high-gain

*All specifications are subject to change without notice*



**SPERRY WEST**

Sperry West Inc.

5575 Magnatron Boulevard  
San Diego, California 92111

e-mail [spyder@sperrywest.com](mailto:spyder@sperrywest.com)  
web site [www.sperrywest.com](http://www.sperrywest.com)

Spyder is a registered trademark of Sperry West Inc.